

General Description


These N-Channel enhancement mode power field effect transistors are using SGT technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

Features

V_{DS}	60V
I_D (at $V_{GS}=10V$)	60A
$R_{DS(ON)}$ (at $V_{GS}=10V$)	7.0m Ω (Typ)

100% UIS TESTED!
100% ΔV_{ds} TESTED!

PDFN5*6



Absolute Maximum Ratings $T_A=25^\circ C$ unless otherwise noted

Parameter	Symbol	Maximum	Units	
Drain-Source Voltage	V_{DS}	60	V	
Gate-Source Voltage	V_{GS}	± 20	V	
Drain Current-Continuous	TC=25 $^\circ C$	I_D	60	A
	TC=100 $^\circ C$	I_D	42	A
Drain Current – Pulsed	I_{DM}	240	A	
Maximum Power Dissipation	P_D	78	W	
Single pulse avalanche energy ⁽¹⁾	E_{AS}	150	mJ	
Junction and Storage Temperature Range	T_J, T_{STG}	-55 To 150	$^\circ C$	

Thermal Characteristics

Parameter	Symbol	Typ	Max	Unit
Thermal Resistance junction-case	$R_{\theta Jc}$		2.3	$^\circ C / W$
Thermal Resistance junction-to-Ambient	$R_{\theta JA}$		62	$^\circ C / W$

Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
STATIC PARAMETERS						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	60			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =60V, V _{GS} =0V			1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V			100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	1.2	1.8	2.5	V
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =15A		7.0	9.5	mΩ
		V _{GS} =4.5V, I _D =12A		9.0	12	mΩ
gfs	Forward Transconductance	V _{DS} =5V, I _D =20A		85		S
DYNAMIC PARAMETERS						
C _{ISS}	Input Capacitance	V _{DS} =30V, V _{GS} =0V, F=1.0MHz		1090		pF
C _{OSS}	Output Capacitance			309		pF
C _{RSS}	Reverse Transfer Capacitance			8.5		pF
SWITCHING PARAMETERS						
t _{d(on)}	Turn-on Delay Time	V _{DD} =30V, I _D =12A, V _{GS} =10V, R _G =3Ω		4.8		nS
t _r	Turn-on Rise Time			7.6		nS
t _{d(off)}	Turn-Off Delay Time			24		nS
t _f	Turn-Off Fall Time			8.9		nS
Q _g	Total Gate Charge	V _{DS} =30V, I _D =15A, V _{GS} =10V		16.5		nC
Q _{gs}	Gate-Source Charge			2.6		nC
Q _{gd}	Gate-Drain Charge			2.7		nC
V _{SD}	Diode Forward Voltage	V _{GS} =0V, I _{SD} =10A		0.72	1.4	V
R _g	Gate resistance	V _{GS} =0V, V _{DS} =0V, F=1MHz		1.6		Ω

Note:

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. V_{DD}=30V, V_{GS}=10V, L=0.5mH, I_{AS}=37A., Starting T_J=25°C
3. The data tested by pulsed , pulse width ≅ 300us , duty cycle ≅ 2%.
4. Essentially independent of operating temperature.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

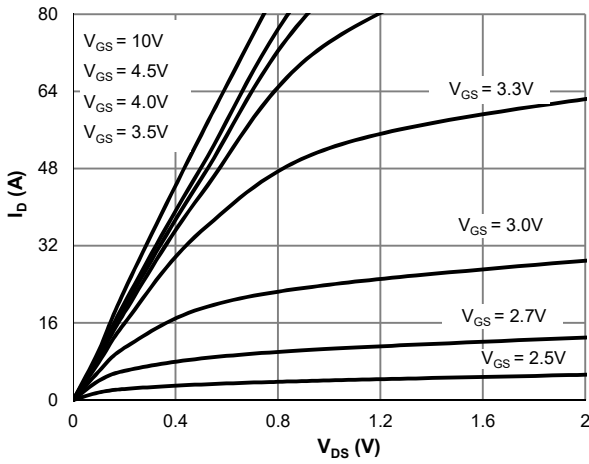


Figure 1: Saturation Characteristics

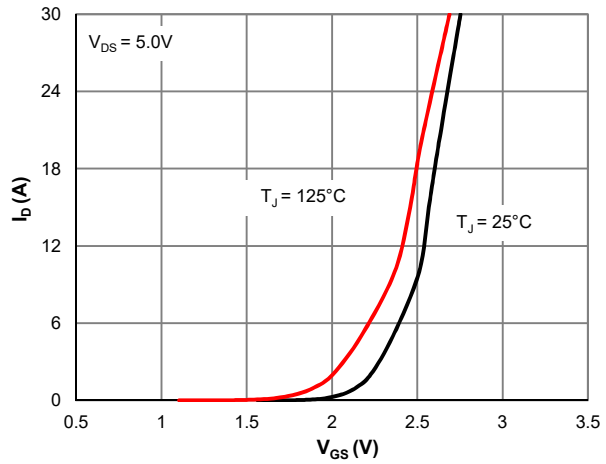


Figure 2: Transfer Characteristics

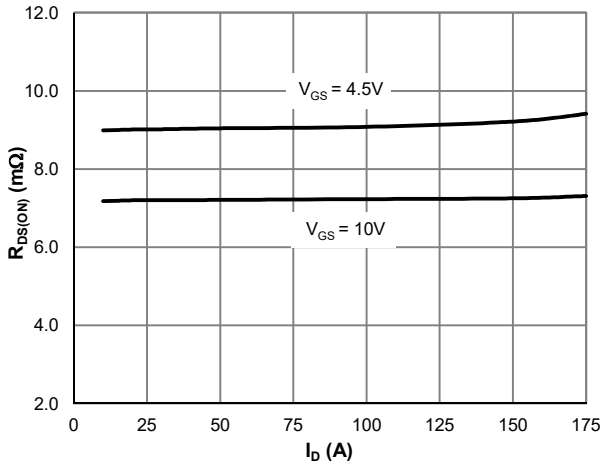


Figure 3: $R_{DS(ON)}$ vs. Drain Current

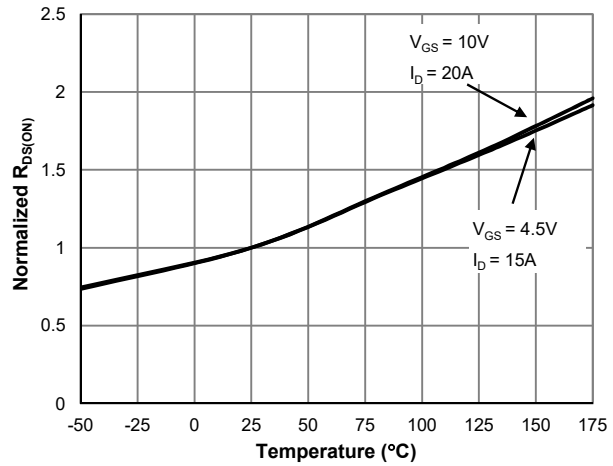


Figure 4: $R_{DS(ON)}$ vs. Junction Temperature

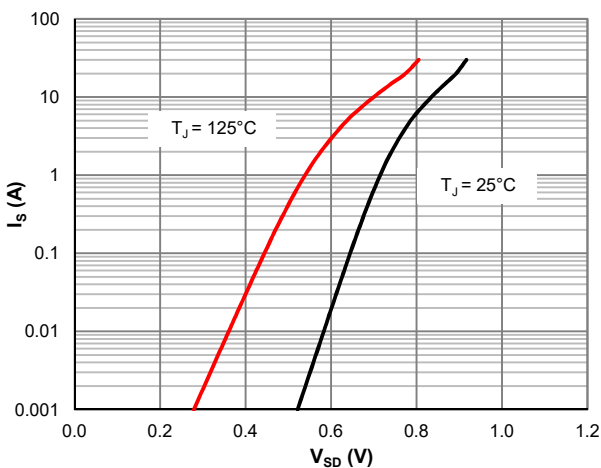


Figure 5: Body-Diode Characteristics

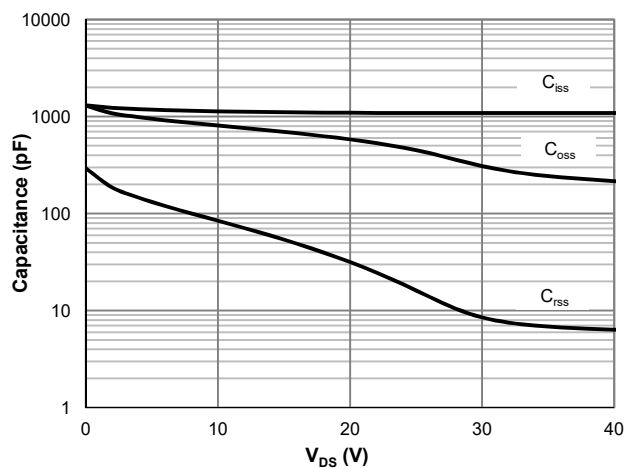


Figure 6: Capacitance Characteristics

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

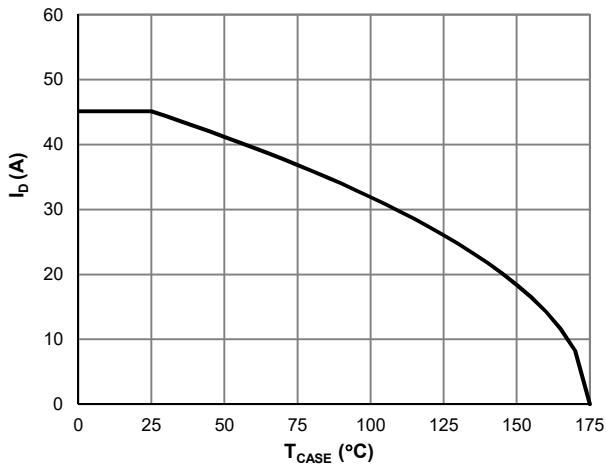


Figure 7: Current De-rating

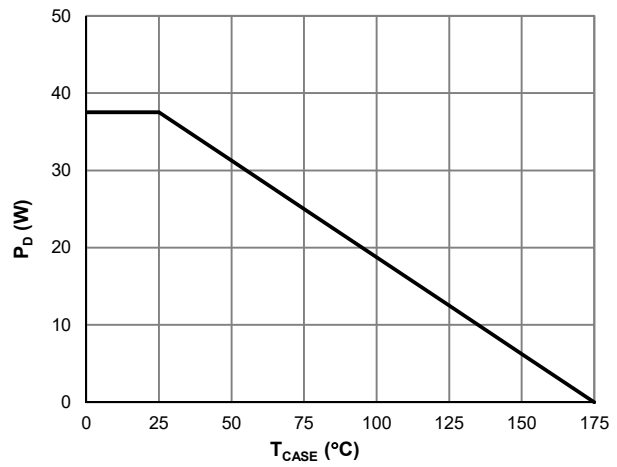


Figure 8: Power De-rating

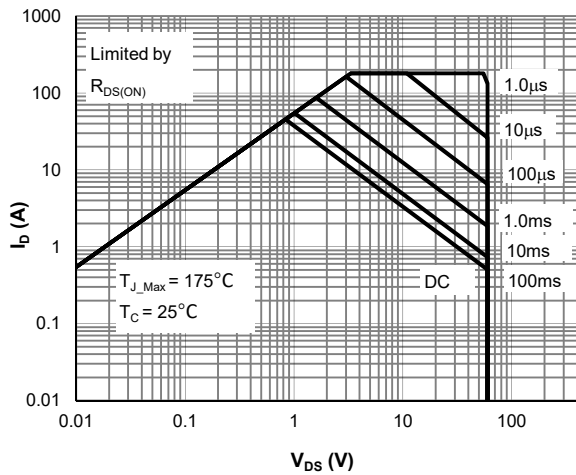


Figure 9: Maximum Safe Operating Area

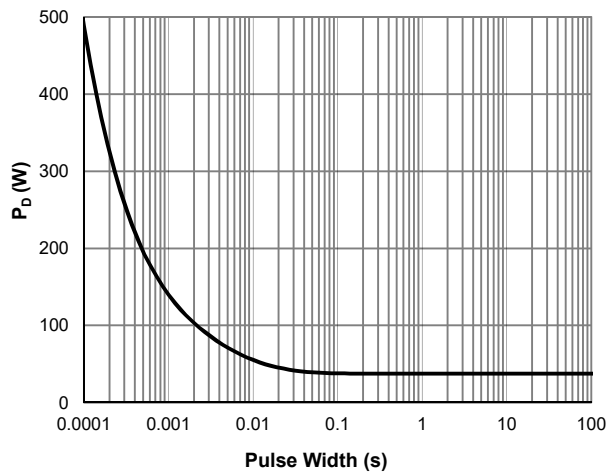


Figure 10: Single Pulse Power Rating, Junction-to-Case


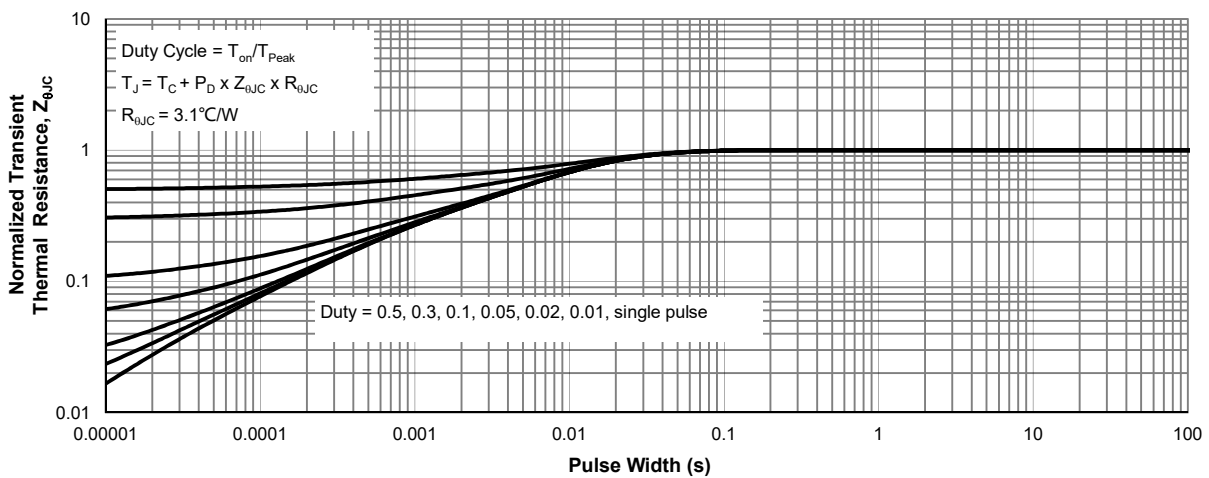


Figure 11: Normalized Maximum Transient Thermal Impedance

PDFN5*6 PACKAGE INFORMATION

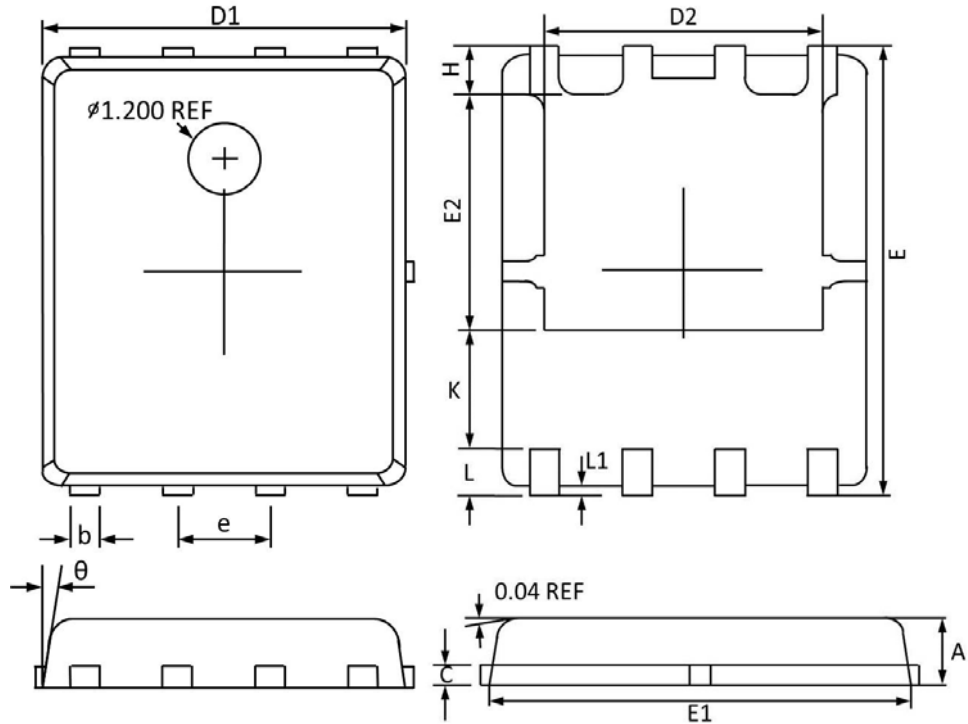

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MAX	MIN	MAX	MIN
A	1.100	0.800	0.043	0.031
b	0.510	0.330	0.020	0.013
C	0.300	0.200	0.012	0.008
D1	5.100	4.800	0.201	0.189
D2	4.100	3.610	0.161	0.142
E	6.200	5.900	0.244	0.232
E1	5.900	5.700	0.232	0.224
E2	3.780	3.350	0.149	0.132
e	1.27BSC		0.05BSC	
H	0.700	0.410	0.028	0.016
K	1.500	1.100	0.059	0.043
L	0.710	0.510	0.028	0.020
L1	0.200	0.060	0.008	0.002
θ	12°	0°	12°	0°