

HC3400

30V N-Channel MOSFET


General Description

The HC3400 combines advanced trench MOSFET technology with a low resistance package to provide extremely low $R_{DS(ON)}$. This device is suitable for use as a load switch or in PWM applications.



Features

V_{DS}	30V
I_D (at $V_{GS}=10V$)	5.8A
$R_{DS(ON)}$ (at $V_{GS}=10V$)	22m Ω (Typ)
$R_{DS(ON)}$ (at $V_{GS}=4.5V$)	25m Ω (Typ)

SOT23



SOT23-3



Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Maximum	Units	
Drain-Source Voltage	V_{DS}	30	V	
Gate-Source Voltage	V_{GS}	± 12	V	
Drain Current-Continuous	TC=25 $^\circ\text{C}$	I_D	5.8	A
	TC=100 $^\circ\text{C}$	I_D	3.7	A
Drain Current – Pulsed	I_{DM}	23	A	
Maximum Power Dissipation	P_D	1.4	W	
Junction and Storage Temperature Range	T_J, T_{STG}	-55 To 150	$^\circ\text{C}$	

Thermal Characteristics

Parameter	Symbol	Typ	Max	Unit
Thermal Resistance junction-case	$R_{\theta Jc}$		1.1	$^\circ\text{C}/\text{W}$
Thermal Resistance junction-to-Ambient	$R_{\theta JA}$		62	$^\circ\text{C}/\text{W}$

Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
STATIC PARAMETERS						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	30			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =30V, V _{GS} =0V			1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±12V, V _{DS} =0V			±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	0.5	0.7	1.2	V
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =4.0A		22	30	mΩ
		V _{GS} =4.5V, I _D =3.0A		25	40	mΩ
		V _{GS} =2.5V, I _D =2.0A		35	50	mΩ
DYNAMIC PARAMETERS						
C _{ISS}	Input Capacitance	V _{DS} =15V, V _{GS} =0V, F=1.0MHz		690		pF
C _{OSS}	Output Capacitance			45		pF
C _{RSS}	Reverse Transfer Capacitance			36		pF
SWITCHING PARAMETERS						
t _{d(on)}	Turn-on Delay Time	V _{GS} =10V V _{DS} =15V R _L =2.6Ω R _{GEN} =3Ω		2.6		nS
t _r	Turn-on Rise Time			8.5		nS
t _{d(off)}	Turn-Off Delay Time			18		nS
t _f	Turn-Off Fall Time			5		nS
Q _g	Total Gate Charge	V _{DS} =15V, I _D =3A, V _{GS} =4.5V		3.7		nC
Q _{gs}	Gate-Source Charge			1.4		nC
Q _{gd}	Gate-Drain Charge			1.5		nC
V _{SD}	Diode Forward Voltage	V _{GS} =0V, I _{SD} =1A		0.72	1.3	V
R _g	Gate resistance	V _{GS} =0V, V _{DS} =0V, F=1MHz		1.5		Ω

Note:

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. The data tested by pulsed , pulse width ≅ 300us , duty cycle ≅ 2%.
3. Essentially independent of operating temperature.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

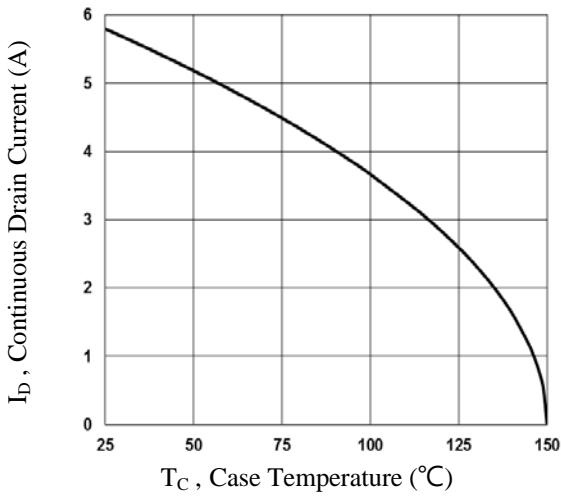


Fig.1 Continuous Drain Current vs. T_C

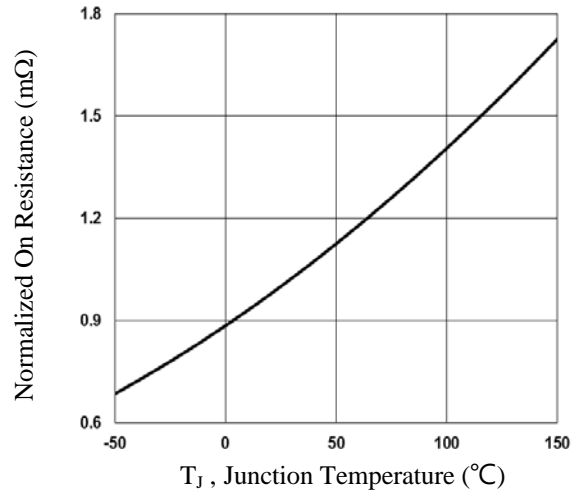


Fig.2 Normalized $R_{DS(on)}$ vs. T_J

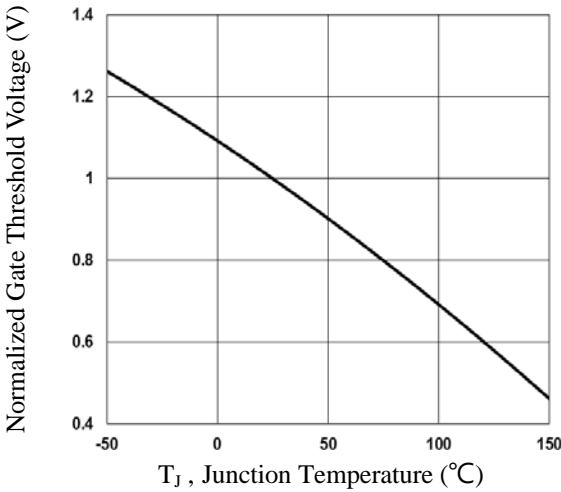


Fig.3 Normalized V_{th} vs. T_J

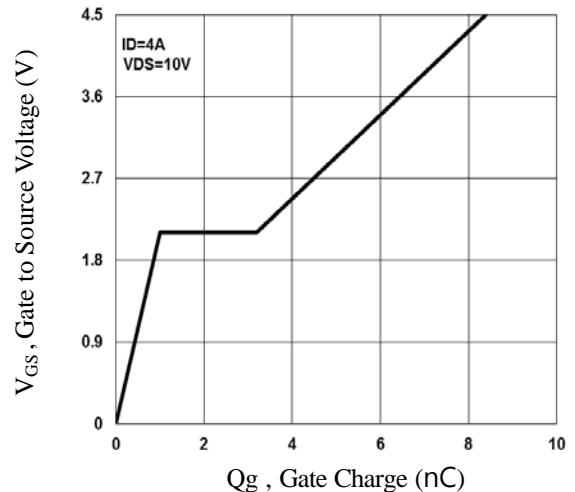


Fig.4 Gate Charge Waveform

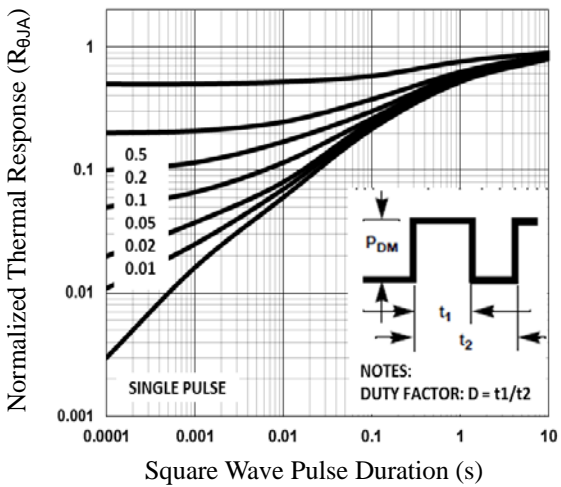


Fig.5 Normalized Transient Impedance

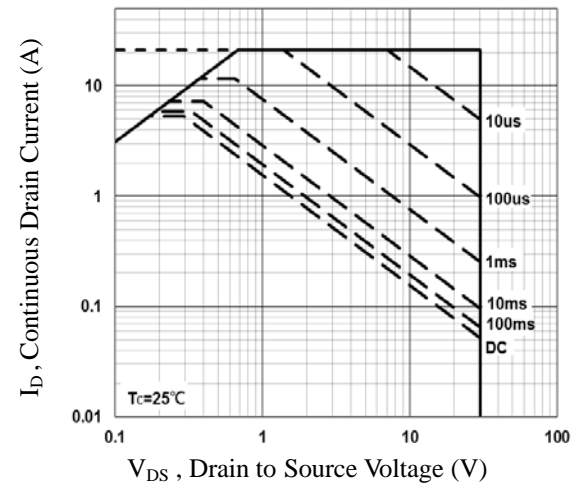


Fig.6 Maximum Safe Operation Area

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

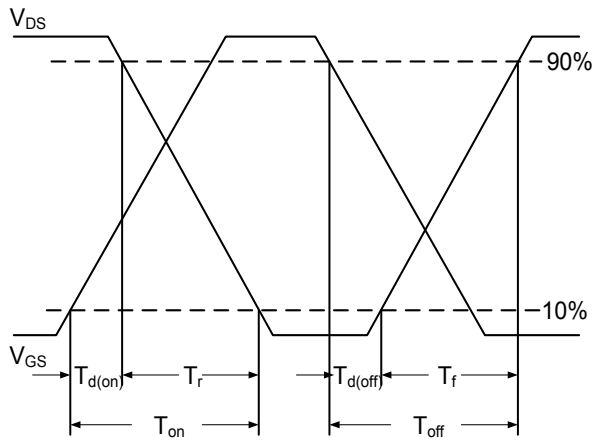


Fig.7 Switching Time Waveform


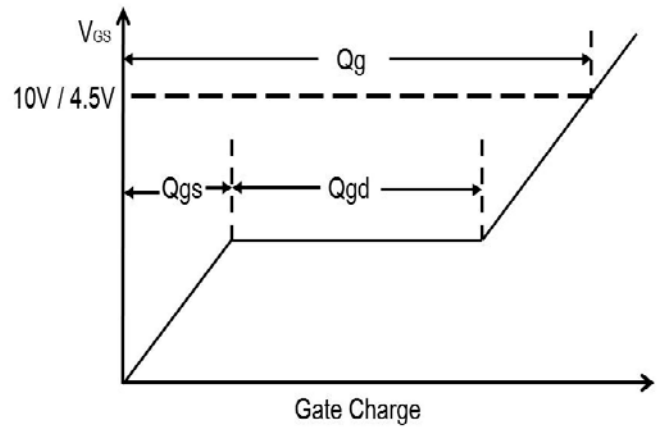



Fig.8 Gate Charge Waveform

SOT23 PACKAGE INFORMATION

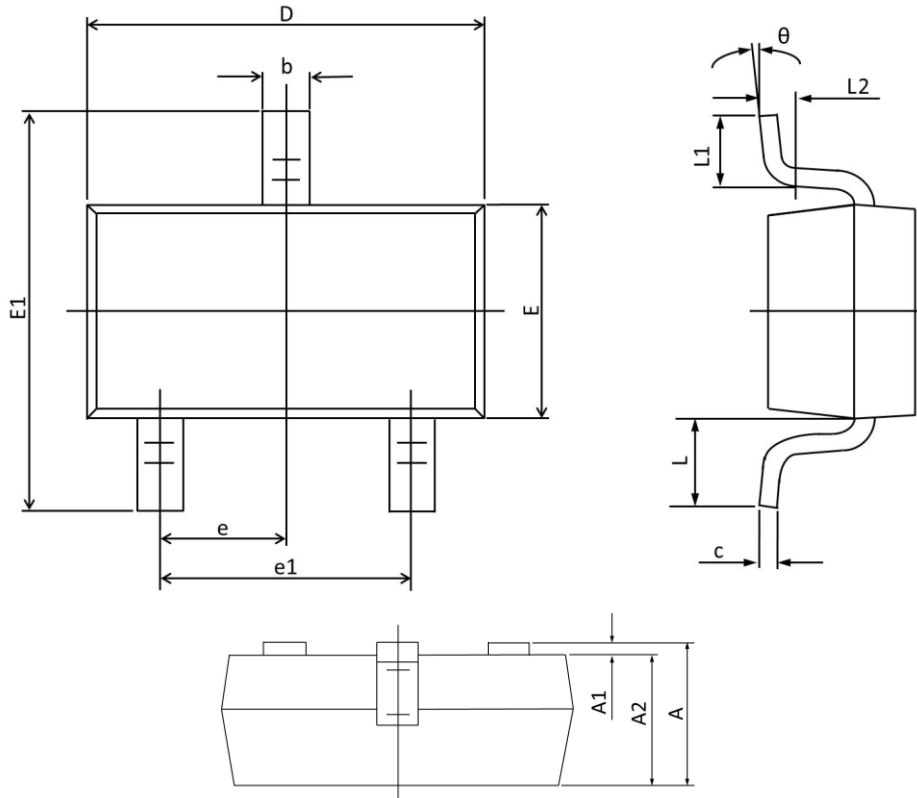

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Max	Min	Max	Min
A	1.150	0.900	0.045	0.035
A1	0.100	0.000	0.004	0.000
A2	1.050	0.900	0.041	0.035
b	0.500	0.300	0.020	0.012
c	0.150	0.080	0.006	0.003
D	3.000	2.800	0.118	0.110
E	1.400	1.200	0.055	0.047
E1	2.550	2.250	0.100	0.089
e	0.95 TYP.		0.037 TYP.	
e1	2.000	1.800	0.079	0.071
L	0.55 REF.		0.022 REF.	
L1	0.500	0.300	0.020	0.012
L2	0.25 TYP.		0.01 TYP.	
θ	8°	0°	8°	0°

SOT23-3 PACKAGE INFORMATION

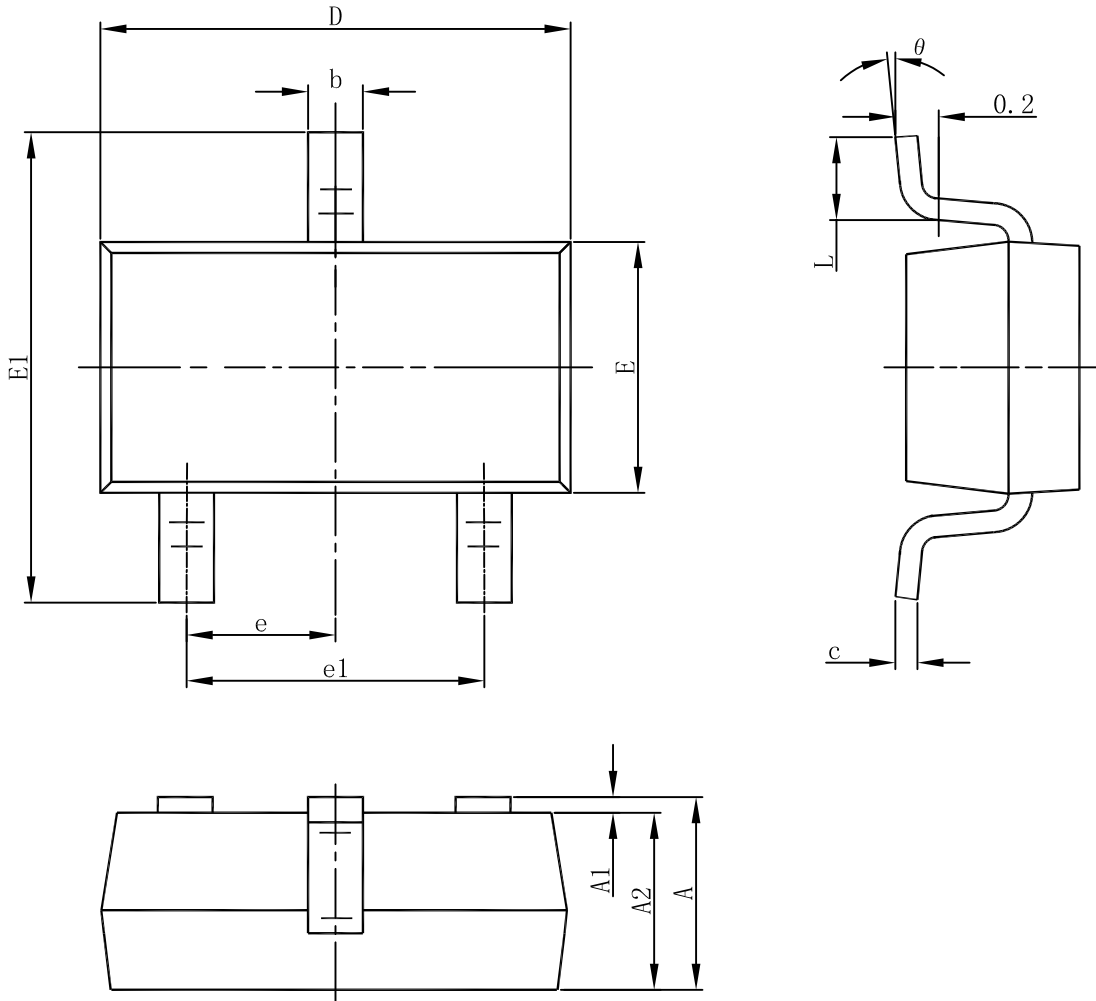

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°